




**100/3T**

**INDUSTRIAL Three phase-2poles-3000RPM-50HZ  
230/400 Voltage**

Mechanical Features			Electric Features		
<b>General</b>			<b>General</b>		
Working moment	<b>1.96</b>	kg.cm	Nominal voltage	<b>Δ:230V</b>	<b>Y:400V</b>
Unbalance	<b>0.98</b>	kg.cm	Input power	<b>0.10KW</b>	
Force	<b>98</b>	kg	Current A max	<b>Δ:0.33</b>	<b>Y:0.19A</b>
<b>Bearing</b>			Power factor	0.76	
TYPE(C&U)	<b>6202</b>		La/in	<b>3.2</b>	
	100%	<b>10818</b>	<b>Certification</b>		
Life(h)	80%	<b>21382</b>	ETL CLASS II DIV.II	<b>T4</b>	
	50%	<b>88369</b>	GROUP F G TENV NEMA 4		
<b>Bearing Grease</b>			ATEX II 3D Ex tD A22 <b>T100°</b>		
Lube Schedule			IP66		
Lube replacement			Amb Temp. <b>(-20°~+40°)</b>		
Grease Type					

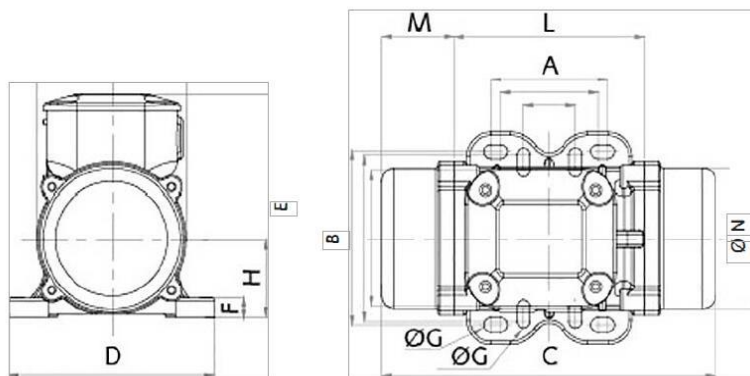

A	62-74
B	106
C	221
M	50
G	9
Holes	4
D	130
E	136
F	12
H	48
I	94
L	121
N	86

Clamping torque(Nm) **23**

weight	Screw	washer	Cable type	Cable Glande
4.7	M8	8.4X16	4GX1.5	M16X1.5

