


SERIE EDT

EDT SERIES - SERIE EDT

Rapporto di variazione 1:3

Variation ratio 1:3

Variationsverhältnis 1:3

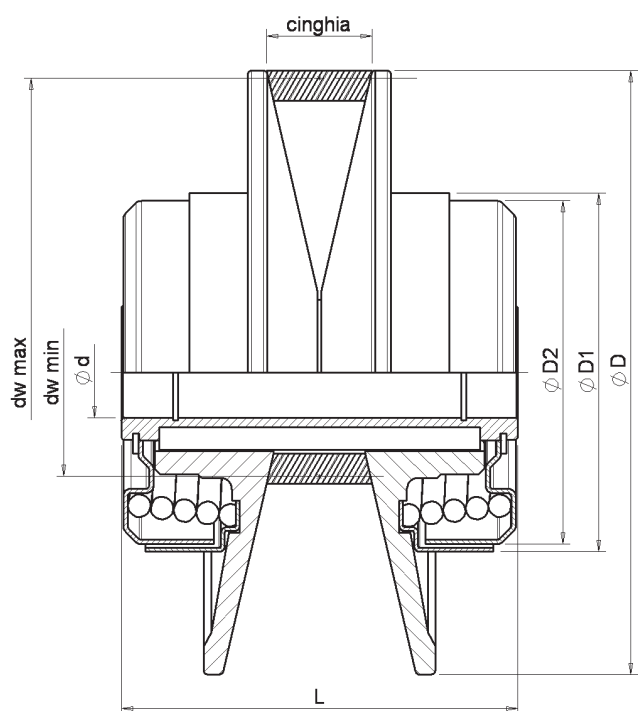

serie EDT



TABELLA DIMENSIONALE (mm) - DIMENSIONS TABLE - GRÖSSENTABELLE

GRANDEZZA SIZE GRÖSSE	130	160	185 ⁽³⁾	200	225	270 ⁽⁴⁾	300	330 ⁽³⁾	360
Potenza (Kw) - Power - Motorleistung ⁽¹⁾	0,75	1,5	2,2	2,2	3	4	7,5	15	18,5
Sezione cinghia - Belt - Reimen	22x8	28x8	37x10	37x10	47x13	47x13	55x15	65x20	70x20
ø d standard ⁽²⁾	14-19	19-24	24-28	24-28	28	28-38	38	38-42	42-48
ø d max ⁽²⁾	24	25	30	30	30	42	42	42	50
ø D	130	160	185	195	225	270	300	330	360
ø D ₁	85	95	95	95	106	133	201	201	201
ø D ₂	77	91	91	91	101	129	196	196	196
dw min	51	56	68	68	72,5	82,5	90,5	96	110
dw max	126	156	180	190	219	263,5	292,5	320	350
L	92	105	125	125	140	150	180	220	220
Peso (kg) - Weight - Gewicht	2	3,5	5	5	7	14	18	25,5	27

(1) MOTORI A 4 POLI 1400/1' - 4 POLES MOTORS 1400/1' - MOTOREN BEI 4 POLIG 1400/1'

(2) FORI - BORES - BOHRUNG: ISO H7

(3) FORNIBILI SOLO SU RICHIESTA - ONLY ON DEMAND - NUR AUF ANFRAGE
ESECUCIONI SPECIALI A RICHIESTA - SPECIAL VERSIONS ON REQUEST - SPEZIALAUSFÜHRUNGEN AUF ANFRAGE

(4) FORNIBILE ESCLUSIVAMENTE IN ESECUZIONE EDS CON MOLLE A DIAFRAMMA - AVAILABLE ONLY WITH DIAPHRAGM SPRINGS -
NUR MIT MEMBRANFEDERN VERFÜGBAR

CAVE - KEYWAYS - NUT: UNI 6604/69 - DIN 6885/1-3

DATI NON IMPEGNATIVI - NOT BINDING DATA - UNVERBINDLICHE DATEN